

REZNOR®

GAS DUCT HEATERS



APPLICATIONS

Built-up Systems & Auxiliary Heating

- » WAREHOUSES / FACTORIES
- » COMMERCIAL / RETAIL
- » INDUSTRIAL
- » COMMUNITY CENTERS
- » ARENAS
- » GYMNASIUMS / FITNESS CENTERS
- » CHURCHES / MEETING HALLS



Capacities



75 - 800 MBH



610 - 14,815 CFM

www.ReznorHVAC.com

Duct Heaters

Reznor duct furnaces are available in models for indoor or outdoor applications. Outdoor models include weatherized cabinet and control compartment. Each model is completely pre-packaged, factory wired, and fire tested. Units are designed for use with standard air handling systems in air conditioning, heating or makeup air applications.

- Can be installed upstream or downstream from cooling coils
- Natural gas or propane fuel
- Easy access to controls and wiring connections
- Constructed of high quality materials
- 4:1 or 2:1 turndown
- 1 to 2 stages
- Standard 110 volt power, optional 208/230/460 volt power
- Up to 90°F temperature rise




TECHNICAL DATA

Model	Heating Range (MBH)	Air Volume Range (CFM)	Installation	Arrangement
EEDU	75 - 400	615 - 6,000	Indoor	Power Vented
RP	125 - 400	1,020 - 5,895	Outdoor	Power Vented
HRPD	250 - 800	1,800 - 14,815	Outdoor	Power Vented
SC	100 - 400	820 - 5,925	Indoor	Separated Combustion
X	75 - 400	610 - 6,000	Indoor	Gravity Vented

The Advantage of Reznor Separated Combustion

Reznor separated combustion system technology eliminates common “open flame” combustion problems such as contaminants in the indoor air, and negative building air pressure.

- ▶ Air for combustion is taken from outside the building, preventing dirt, lint, dust or other contaminants in the indoor atmosphere from being burned.
- ▶ The combustion air flow is unaffected by negative building pressure or wind which can cause nuisance shutdown.
- ▶ Only one building penetration, horizontal or vertical (see the illustration at right).

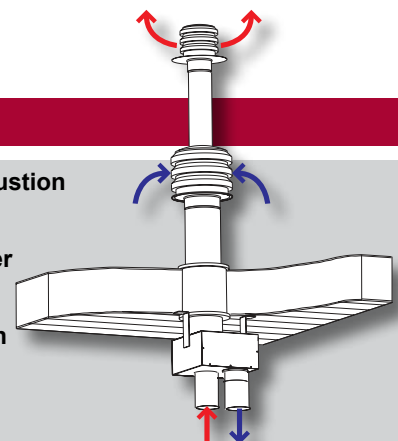

For complete catalog information including submittals, energy calculations, dimension drawings, and more go to www.ReznorHVAC.com or call 800-695-1901.

Note: In keeping with our policy of continuous product improvement, we reserve the right to alter, at any time, the design, construction, dimensions, weights, etc., of equipment information shown here.